

American Society of Safety Engineers – Middle East Chapter (161)
7th Professional Development Conference & Exhibition
March 18-22, 2005
Kingdom of Bahrain
www.asse-mec.org

Moving Beyond Compliance - The role of risk
tools in improved operational performance

Dr Jeremy Linn
Regional Manager, UK,
BeNeLux and Americas
DNV Software, London, UK
Jeremy.Linn@dnv.com

Dr Nic Cavanagh
Global Product Manager
DNV Software, London, UK
Nic.Cavanagh@dnv.com

ABSTRACT

The management of risks associated with the process industry has traditionally focused on safe operation rather than improved financial performance or increased productivity. With major advances in Information and Communication Technology (ICT) over recent years and the maturing technology used for software tools and related models, the emphasis is now moving beyond straight-forward compliance with safety legislation. In recent years, with greater global competition and much more challenging margins, the business environment has changed. It is now more difficult to justify activities that do not contribute directly to the bottom line, or are perceived as such. ICT advances, along with growth in Internet technology, have brought a highly connected environment where corporations can share information and collaborate globally. Combined with this is a need for corporations to be more transparent in their corporate governance and demonstrate their performance in relation to the environment and society as well as financially.

The combination of ICT advances with the maturity of models used for QRA and related technologies means that the move from compliance based systems to performance based risk management or Risk Based Operations is now possible and desirable. By linking QRA technology with other enterprise applications such as Enterprise Resource Planning (ERP) and Enterprises Asset Management (EAM) systems, company wide risk based performance management systems become possible. This paper reviews the history of QRA

software in this context, assesses how much of the technology developed over the last 20 years for safety management can be integrated with mainstream information systems and applied to improving and managing operations. It goes on to look at the state-of-the-art with regard to risk based operational management and to discuss how latest technology in terms of risk modelling, information management software and ICT can be used to improve operational performance.

2 INTRODUCTION

Traditional risk assessment for process plants is most often driven by the needs for compliance with regulations such as the SEVESO II directives in Europe and the EPA Risk Management Plan regulations in the US¹. Many operators will set their own, more stringent, standards for safety which will impact on the risk assessments but in the main these assessments are done in specialist departments outside of the day-to-day operations management. Formal risk assessments like a Quantitative Risk Assessment (QRA) for regulatory compliance will only be amended when there is a plant modification or a periodic update is required by regulators. Many of the methodologies used today are based on technology developed twenty to thirty years ago. In that same time span the developments in Information and Communication Technology (ICT) have been significant. Processor speeds have advanced massively, PC's have been introduced and are the primary platform for many engineers, network technology has advanced, along with email and many more technologies.

The combination of these ICT advances with the maturity of models for QRA and related technologies means that the move from pure compliance based systems to operational systems utilising risk methodologies or Risk Based Operations is now possible and desirable. When quantifying risks these need not be only those that result in fatalities, as in traditional QRA, but also effects on the environment, downtime or dollars and other potential losses. Also, these technologies can be linked with other enterprise wide applications such as Enterprise Resource Planning (ERP) and Enterprises Asset Management (EAM) systems to provide a company wide risk based performance management system, providing real-time information on the operational and financial impacts of decisions on safety and risk. By quantifying the impact of process hazards on business operations and with the use of real-time information on the status of operations, managers can assess the likely impacts of decisions on safety and business risks and thereby proactively manage the operational risk that the business is exposed to on a day-to-day basis.

3 HISTORICAL EVOLUTION OF QRA TOOLS

QRA in the context of process plant safety provides a methodology for quantifying the risks associated with the activities involved in the production and processing of chemicals and petrochemicals. In order to quantify risks it is necessary to first identify all possible risk situations, quantify them in terms of event consequence and likelihood and compare them with acceptance criteria. Key steps in performing a QRA are to identify the hazards, analyse the consequence, estimate the likelihood, combine consequence and likelihood to quantify the risks and put measures in place to mitigate and manage those risks. The key objectives of any such analysis are to identify the major hazards, quantify the overall risk, optimise the risk reduction measures to be implemented and to help the decision making process with regard to acceptable risk criteria.

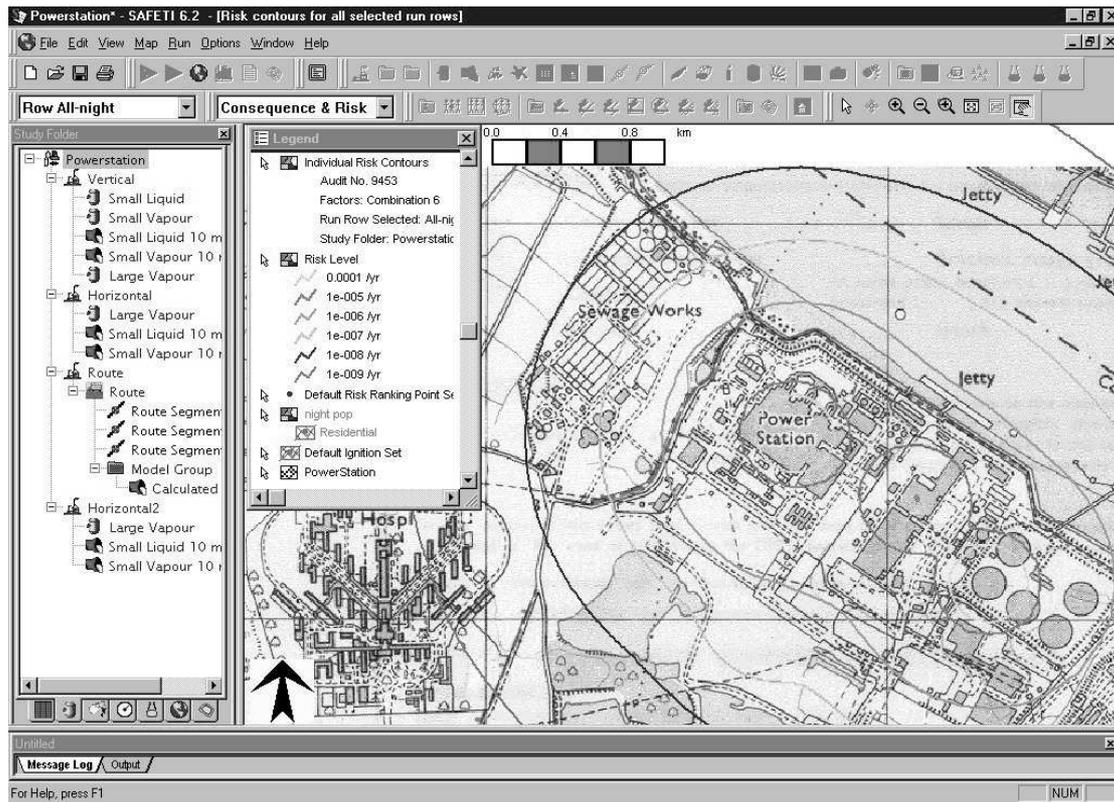


Figure 1 – Typical Individual Risk Contours displayed using SAFETI

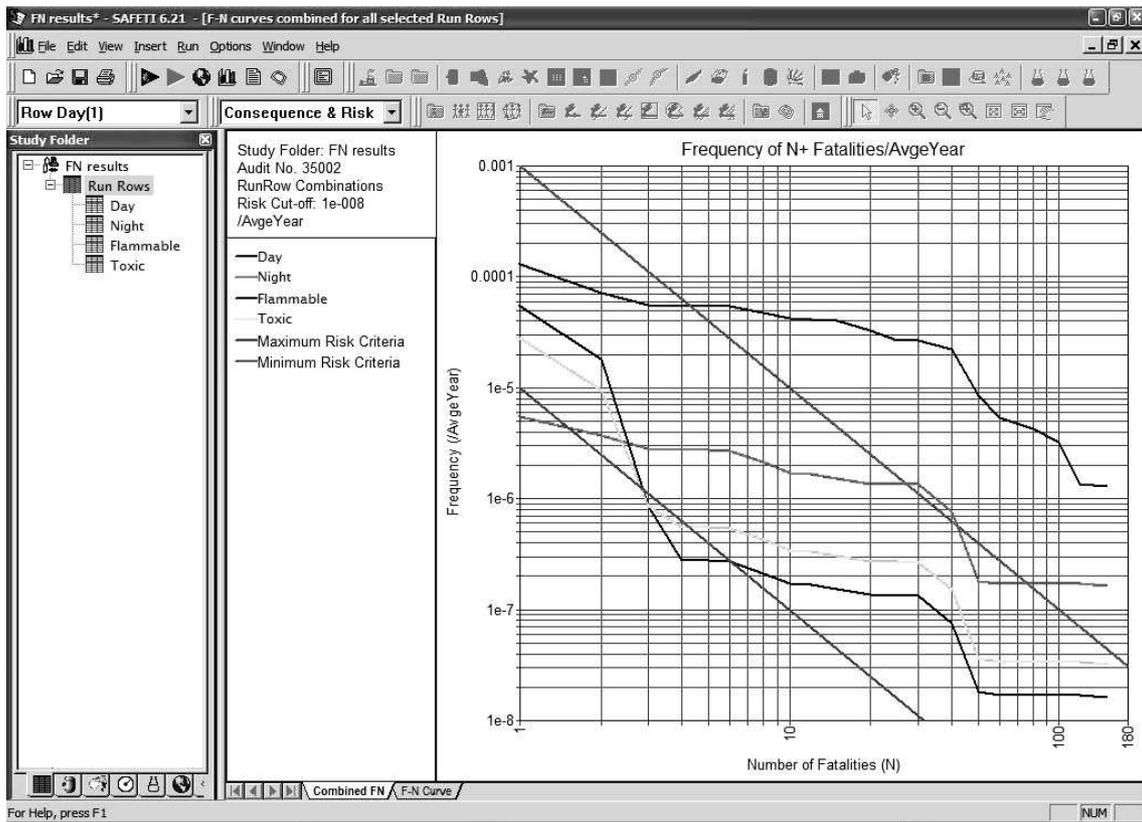


Figure 2 – Typical FN Curves for Societal Risk displayed using SAFETI

Typical outputs of a QRA study are individual risk contours as illustrated in Figure 1 and the FN curve for representation of societal risk as illustrated in Figure 2. Individual risk can be defined as "the frequency at which an individual may be expected to sustain a level of harm from the realisation of specified hazards" and is usually taken to be the risk of death expressed as a risk per year. Societal Risk is defined as "the relationship between the frequency and the number of people suffering a given level of harm from the realisation of specified hazards". It is normally taken to refer to the risk of death expressed as a risk per year and displayed as FN curves.

The first commercially available software tools for Process QRA² were developed in the early 1980's. The key drivers at this time were a number of major accidents, like Flixborough and Seveso, and later Bhopal. These resulted in legislation being implemented in a number of countries, particularly the Netherlands, which made QRA obligatory to ensure risks of further major accidents were minimised applying acceptable risk criteria and principles of ALARP³.

At that time, the techniques and methodologies developed to enable large scale QRA to be performed challenged the computing power available. This limited the possibilities and meant that the software architecture had to be carefully

designed to enable the necessary calculations to be made within the IT limitations of that time.

Since then ICT has developed rapidly and continuously⁴ and the last 20 years has seen massive advances in the technology available. However, the methodologies used in performing QRA have generally remained relatively static. Although individual components of the QRA have improved in-terms of both modelling accuracy and speed of operation, the underlying architecture still largely supports the classical risk analysis methodology illustrated in Figure 3. These analyses are usually performed with single-user PC applications, which are not connected to the larger ERP or EAM systems, by an experienced risk analyst, with updates being infrequent and driven by legislation or changes to the plant or process.

These static analyses are extremely valuable to a business and studies built in tools like SAFETI³ represent significant investment and intellectual capital and knowledge regarding the risks associated with the process plant. But there are limitations to this approach. For example, domino effects or escalation is difficult to account for using the classical approach, which is largely a series of sequential calculations or summations and assumes that hazardous events are independent of each other. However, such a model can be extended to look at other potential losses from process hazards as well as those to people^{5,6}.

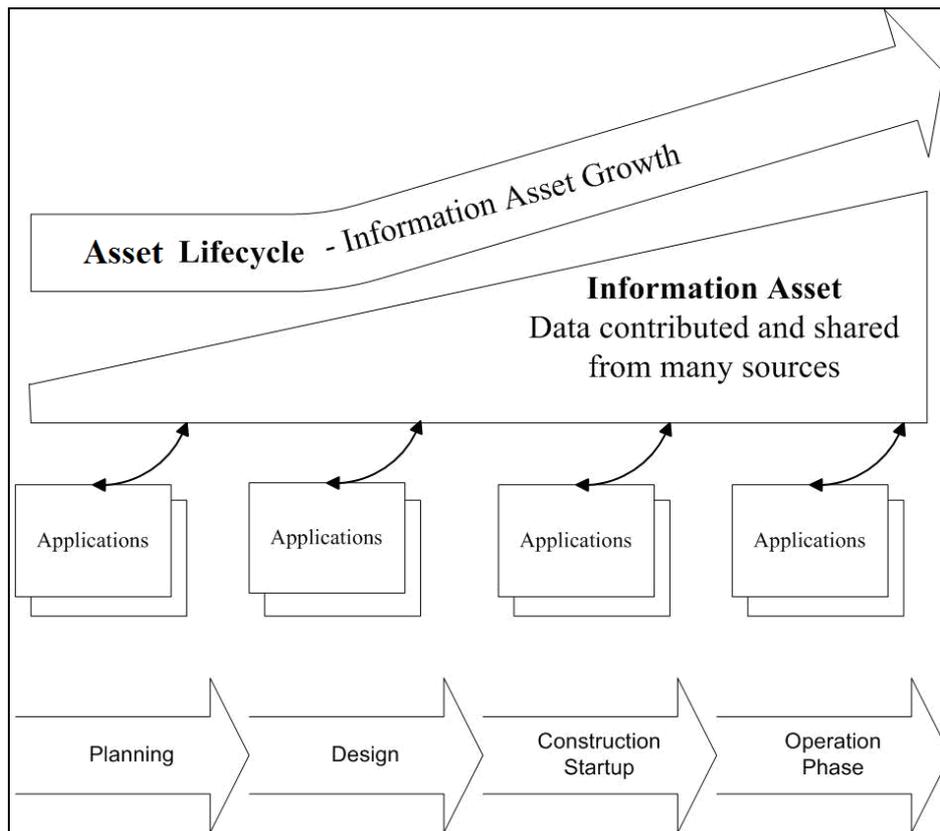


Figure 4 – Information Asset Growth through Asset Lifecycle

The combination of maturity in risk modelling, large quantities of related data and advances in ICT begin to make Risk-Based Operations (RBO)⁸ a real possibility.

If it can be shared, re-used and maintained, this wealth of information is of enormous value. The data are a huge knowledge base from which corporate learning can be derived to improve best practice, and should an asset be sold can provide valuable insight to a purchaser as to the value of the asset. The concept of the 'information asset' is illustrated schematically in Figure 4 in the context of the process industry. As a plant (or any other asset in fact) progresses through its lifecycle, the information asset grows as information is added and shared from other processes and applications.

Much of the information required before a classical QRA can be performed will exist in datasets belonging to different departments within an organisation. The software applications used to manage the data may come from different vendors and it is likely to be structured in different ways. This requires a common data modelling system so that the applications can communicate and data can be published to and retrieved from the system. Such systems are now emerging, like Intergraph's SmartPlant Foundation⁷, for example, as mentioned earlier.

Even though the data may already exist in other applications within the organisation, the entry

and manipulation of these data for QRA remains a largely manual process. One of the first steps to extending the role of risk tools beyond compliance to meet the broader business needs of industry is to take advantage of latest ICT to facilitate the kind of data management described above. As an example, in the latest version of SAFETI we have taken a first step towards enabling data integration with other applications by incorporating Intergraph's GeoMedia GIS system.

4 BUSINESS NEEDS

Today's business environment with global competition and the ever present needs to improve efficiency means that innovations within process plant operations must justify their contribution to the business, more often than not by a contribution to the financial well being of the business. Businesses are also under pressure to be more transparent in their reporting providing not only financial information but also detailing contributions to social and environmental well being or Corporate Social Responsibility (CSR).

At the centre of any risk based approach is the objective to manage risks and enhance safety within operations. Pitblado⁸ has shown that although the industry has greatly reduced injuries there seems to be less evidence that there has been a significant reduction in major accidents.

Analyses of US and EU data have failed to identify any noticeable downwards trend in major accidents. The one exception to this is within the UK offshore oil sector which is managed by a safety case regime⁹. This has taken recommendations from Lord Cullen's report from the Piper Alpha Inquiry. The focus has been on addressing major accidents through a number of mechanisms, some of which are not present in other regulations.

In assessing performance of the UK legislation the incidence of leaks has been evaluated with the belief that major leaks are a good indicator of the potential for a major accident, although there are insufficient data to identify a correlation between the two. The UK data indicate a significant drop in the number of major leaks reported. Interestingly medium leaks reduced less and minor leaks increased with this approach.

The UK Offshore safety case regime requirements have the following elements

- Safety management system
- Risk Assessment
- Quantitative risk assessment demonstrating meeting a defined risk target
- Identification of safety critical elements (critical barriers)
- Performance standards for all safety critical elements
- Lifecycle programme to maintain critical barriers (written schemes of examination)

The implications of this are that safety is no longer assessed and addressed through a snap-shot assessment made every few years but assessment of the elements controlling risk and thereby safety are monitored and maintained as part of the on-going operational processes.

The industry has made many initiatives in the application of risk based methodologies to the control of safety critical elements. Examples include Risk Based Inspection (RBI), Risk Based Maintenance (RBM) and more lately RBO. These initiatives continue with innovations such as Bow-Tie diagrams and Matrix of Permitted Operations. These innovations will continue to improve safety and drive down the numbers of accidents by pulling safety more into the mainstream operations.

When accidents happen not only can there be loss of life but many other losses can occur that can have a significant impact on the environment and business often costing many millions of dollars. Fewtrell and Hirst¹ examined the costs of accidents post Flixborough and from UK accidents reported quoted losses at the time of the accident up to £100M (1996 values). When looking at accidents internationally the maximum reported loss from a single accident was nearly \$1.5 billion when including business interruption costs. Kersten and Mak¹⁰ reported that in the explosion at the Atofina

plant in Toulouse in September 2001, 29 people were killed, 2500 injured (30 severely) and material losses were assessed at €2.3 billion.

As well as costing lives these kinds of losses can obviously have a huge impact on a business, the environment, the local population, on surrounding businesses and those that depend on them. There is a clear opportunity for businesses to apply the knowledge and expertise of the safety practitioners to the broader business risk environment. Innovations that have been used to improve safety can be extended to other identifiable types of loss and used to manage a broad range of risks thus minimising many of the potential major losses to a business.

Companies have suffered massive financial losses and entire economies have been disrupted by incidents where asset loss has been minimal and there have been few fatalities. Two well documented examples are the Longford gas explosion in Australia¹¹ in 1998 and the Seveso Dioxin release¹² in July 1976. In the case of Longford there were only 2 fatalities but the cost to industry was estimated to be in excess of \$1.3 billion. So, from the health and safety standpoint both incidents were relatively minor compared to, say, the Toulouse Ammonium Nitrate release in France in 2001 or the Fluxys Natural Gas release at the Ghislengien Industrial Estate in Belgium in 2004.

5 EXTENDING TRADITIONAL QRA TO OTHER LOSSES

This concept of extending the traditional process QRA to look at other losses to the business is one we have termed Process Business Risk. It is not the intention of this paper to discuss this approach in detail as this is covered in another paper¹³ and the reader should refer to this for more information. The approach considers potential losses in financial terms and losses covered include:

- Impacts on people in terms of both injuries and fatalities
- Property damage in terms of both capital costs to replace damaged equipment and damage to other property
- Business interruption
- Inventory loss
- Environmental damage including clean-up costs, fines and impact on flora and fauna
- Plus many others (legal costs, loss of reputation, brand image, compensation, etc.)

Results can be presented in the form of cumulative frequency of a loss of \$x or more for each type of loss as shown in Figure 5.

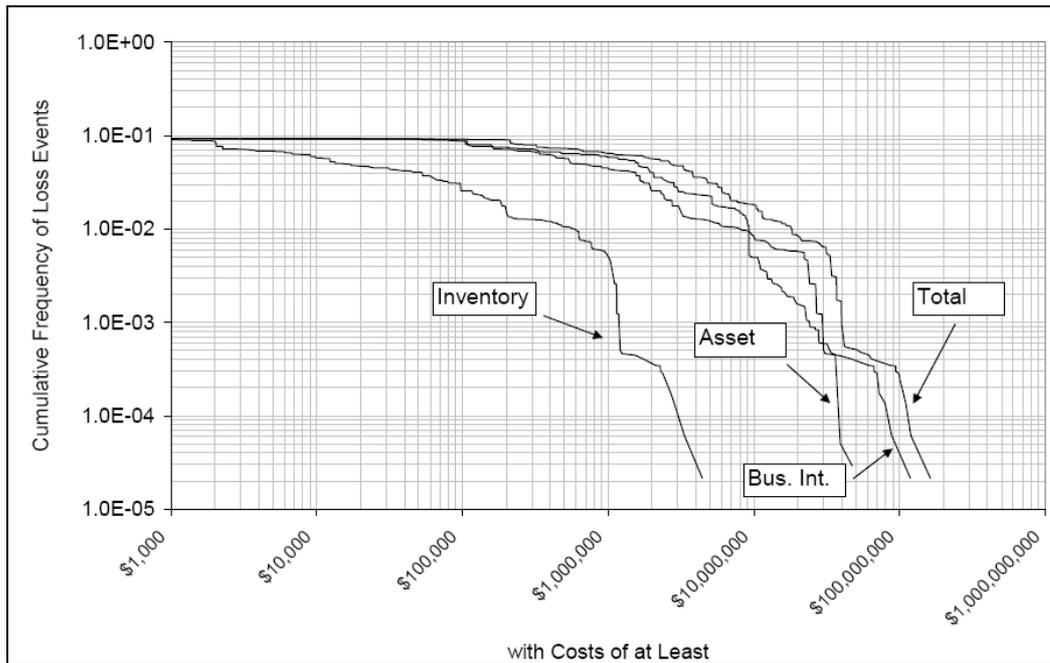


Figure 5 – Typical F\$ Curves for different Components of a Business Risk Model⁵

Results may be interrogated to find the process hazards which are contributing the most to certain types of loss so that these can be targeted with risk reduction measures. This type of approach has also been used in reducing insurance premiums and negotiating deductibles. It can easily be seen how this approach could make a significant contribution to CSR and demonstrate the financial benefits through reduced exposure to financial loss of risk reduction measures.

However this is still a static analysis, relying on periodic updating. It is not directly connected to operational systems so that plant operators can use risk based systems to support operational decision making. This is addressed in the next section.

6 THE MOVE INTO OPERATIONS

The vision and concepts described above could easily be performed as an infrequent analysis by a risk expert with a report to the management, similar to the way a QRA analysis may be used as input to a safety case. However, the true value of an approach where the true potential cost of an

accident or accidents is assessed cannot be realised unless it is integrated with the operational management and planning systems. Steps have been taken in this direction. For example, today we see the integration of RBI analysis tools with inspection databases which store detailed technical inspection results, to interchange data and optimise inspection strategies. Further integration with ERP and CMM systems allows an optimised inspection plan to be implemented. This is a huge step forward but the inspection plans are optimised infrequently and there is no real dynamics with the operations.

Based on experiences gained in the North Sea through the UK Offshore Safety Case regime the focus was put on the barriers in place to mitigate risks. An approach arising from this is the Bow-Tie concept illustrated in Figure 6. In the centre of the diagram is the 'Top Event' or process hazard. To the left are the barriers or safeguards that aim to prevent the top event from occurring, to the right are all the safeguards that aim to mitigate the potential consequences from the top event.

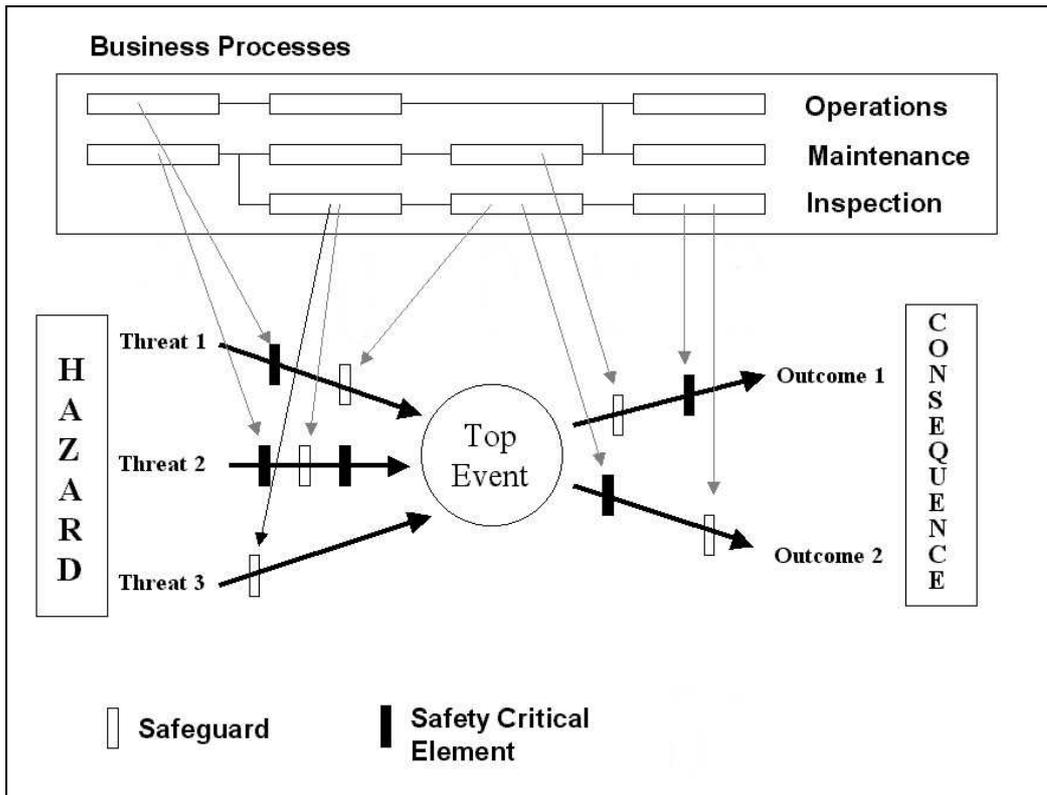


Figure 6, 'Bow-Tie' Diagram

Safeguards can be varied in nature. These may include use of personnel with relevant experience, additional training, inclusion of ESD valves, operational procedures, fire fighting equipment and so forth. Using this approach it is critical to know the status of each safeguard in real time to support decision making.

It can readily be seen that by analysing all potential top events and quantifying all potential outcomes for all types of losses a picture of the risk exposure at any point in time can be built up. Safeguards to the left of the top event affect the likelihood that the event will take place, in QRA terms the frequency of the event. Those to the right impact the potential consequences of an event and can increase or reduce the severity of a top event.

By linking real-time systems from the plant to the Bow-Tie approach, changes to the status of safeguards can be used immediately to update the risk picture. These data may come from ERP systems for scheduling maintenance or personnel lists, from computerised production management systems or the CMMS.

The status of the safeguards could be used as input to a digital dash board distributed over the company LAN using Internet technologies so that the risk status can be view graphically in a web browser. This would enable real-time risk to be communicated quickly and easily to the relevant decision makers of an operation.

One use of this could be with a matrix of permitted operations (MOPO) where certain operations are only allowed when specific safeguards are in place or perhaps procedures could define certain actions required when specific levels of risk were exceeded.

Today's ICT means that it is possible to integrate these systems, update analyses with sufficient speed and distribute and communicate the information to make systems like the one above meaningful and useful. Through this integration risk analysis begins to contribute directly to the bottom line and the overall operational efficiency.

7 CONCLUSIONS

QRA has traditionally been used to ensure safe operation, often from a compliance perspective. But, as demonstrated above, as well as costing lives, major accidents can have other social, environmental and economic consequences. Classical methodologies like QRA can be extended to assess a broader range of business risk and ICT is now at a stage where it can support such extensions, particularly within the operational decision making processes.

Risk results can be linked through other techniques, like Bow-Tie diagrams, to risk indicators and other decision support systems. By doing this in real-time, operational decisions can be made based on current risk, not based on a single risk snap-shot

taken at some time in the past. Furthermore, “risk” in this context does not just refer to risk to life. By linking with Process Business Risk, the risk from a number of standpoints can be considered simultaneously, like life, property, the environment and so on. Setting priorities in each risk category allows appropriate operational decisions to be made.

Live links from Process Business Risk tools to enterprise systems could be used to update the status of barriers and to aid operational decision making, enabling decisions to be made based on actual risk, not perceived risk. Using this kind of system, major contributors to risk can be identified for action and the consequences of these actions will be apparent immediately.

These systems also provide an environment for corporate learning and capturing of best practice. By incorporating the lessons learned from day-to-day operations into the risk analyses, the safeguards and operational procedures, business risks can be reduced and managed more visibly. Also the impact of decisions on business risks can be quantified before they are taken and various options analysed so that risks can be minimised whilst production is optimised.

REFERENCES

1. Fewtrell, P. and Hirst, I.L., A review of high cost chemical/petrochemical accidents since Flixborough 1974, IChemE Loss Prevention Bulletin, No. 140, April 1998.
2. Worthington, D.R.E. and Witlox, H., 2002., SAFETI Risk Modelling Documentation – Impact of Toxic and Flammable Effects, DNV Software Risk Management Solutions, October 2002.
3. Cavanagh, N.J., Calculating Risks, Hydrocarbon Engineering, Volume 6, Number 6, Palladian Publications, London, June 2001.
4. Worthington, D.R.E. and Cavanagh, N.J., The development of software tools for chemical process quantitative risk assessment over two decades, ESREL 2003 Conference, Safety and Reliability, Maastricht, The Netherlands, 2003
5. Chippindal, L. and Butts, D., Managing the Financial Risks of Major Accidents, Annual CCPS Conference, Emergency Planning: Preparedness, Prevention and Response, Orlando, Florida, 2004.
6. Evans, J. and Thakorlal, G., Total Loss Prevention – Developing Identification and Assessment Methods for Business Risks, 11th International Loss Prevention Symposium, Prague, 2004.
7. Intergraph, The Engineering Framework, Integrating the Plant Information Asset throughout the Plant Lifecycle, Intergraph Process, Power and Offshore, 2002.
8. Pitblado, R.M., Real-Time Safety Metrics and Risk-Based Operations, 11th International Loss Prevention Symposium, Prague, 2004.
9. HSE Offshore Safety Case Regulations, 1992.
10. Kersten, R.J.A. and Mak W.A., Explosion Hazards of Ammonium Nitrate; How to Assess the Risks, International Symposium on Safety in the Manufacture, Storage, Use, Transport and disposal of Hazardous Materials, Tokyo, 10-12 March 2004.
11. Kenney, G.D., Boulton, M. and Pitblado, R.M., Lessons for Seveso II from Longford Australia, SEVESO 2000, Risk Management in the European Union of 2000: The Challenge of Implementing Council Directive 96/82/EC, Athens, November 10-12 1999.
12. Pocchiari, F., V. Silano, and G. Zapponi., The Seveso Accident and its Aftermath – Insuring and Managing Hazardous Risks: From Seveso to Bhopal and Beyond, pp. 60-78, Editors P. Kleindorfer and H. Kunreuther, Berlin: Springer-Verlag, 1987
13. Cavanagh, N. J. and Linn, J. D. M., Process Business Risk – A methodology for assessing and mitigating the financial impact of process plant accidents, ASSE-MEC Seventh Professional Development Conference and Exhibition, Bahrain, 2006